

Terminal Junction Boxes

SERIES HANSE - IP66

- Protection degree
- Impact resistance
- Operating temperature
- Housing material
- Colour
- Set consisting of

IP66 (IP55 without sealing plug)
IK07
-25°C...+40°C
ABS, halogen-free
Light grey, RAL 7035
Base, cover with rubber gasket, (connection terminal), mounting screws (stainless steel V2A), sealing plugs, sealing diaphragm



H01: Without terminal - H02: With terminal



BXPkABS888853-H01
BXPkABS888853-H02



BXPkABS989861-H01
BXPkABS989861-H02

















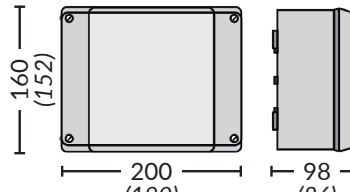
BXPkABS11913970-H01
BXPkABS11913970-H02



BXPkABS12516782-H01
BXPkABS12516782-H02



BXPkABS16020098-H01
BXPkABS16020098-H02

TERMINAL TYPE	5 poles ≤2.5mm ² - 20A - AC400V 3~ ≥4mm ² - 25A - AC250V 1~	5 poles ≤4mm ² - 25A - AC400V 3~ ≥6mm ² - 32A - AC250V 1~	5 poles ≤6mm ² - 32A - AC400V 3~ ≥10mm ² - 50A - AC250V 1~	5 poles ≤10mm ² - 50A - AC400V 3~ ≥16mm ² - 65A - AC250V 1~	5 poles ≤25mm ² - 80A - AC400V 3~ ≥35mm ² - 100A - AC250V 1~
METRIC KNOCK-OUTS	  incl. 4 x M20 grommet Ø6-13mm	  incl. 4 x M25 grommet Ø9-17mm	  incl. 3 x M32 grommet Ø9-23mm	  incl. 3 x M32 grommet Ø9-23mm	  incl. 3 x M40 grommet Ø17-30mm
DIMENSIONS (mm)	Outer / (Inner)  88 (80) x 53 (36)	Outer / (Inner)  98 (90) x 61 (53)	Outer / (Inner)  119 (110) x 70 (61)	Outer / (Inner)  125 (118) x 82 (72)	Outer / (Inner)  160 (152) x 98 (86)

This wall cabinet housing made of ABS is suitable for both indoor and outdoor use. It is easy to use and very quick to install.

The integrated inner hinge can be installed on both sides of the housing and opens the cover like a door. This allows post-processing

to take place inside the housing without problems and without having to put the cover aside. Due to its 30% thicker outer walls the housing has a high impact resistance of IK10. In addition the housing has a high water and dust proof performance of IP 67.

This series is a cost-effective alternative to all sheet steel wall cabinets.

Wall Hinge Housing

SERIES PERLE - IP67

- Protection degree IP67
- Impact resistance IK10
- Operating temperature -40 to +80°C UL94HB
- Housing material ABS
- Colour Light grey, RAL 7035
- Set consisting of Base, cover with PUR seal, mounting screws, internal hinge



BXPFAG360270160-P01



BXPFAG540270160-P01



BXPFAG540360160-P01

TECHNICAL DATA	Internal hinge connection on both sides 4 x cover screws 70 x Screw domes in base 4 x Flange connection pre-stamping (2 x 210mm*80mm, 2 x 290mm*80mm)		
	Internal hinge connection on both sides 6 x cover screws 116 x Screw domes in base 6 x Flange connection pre-stamping (6 x 210mm*80mm)		
DIMENSIONS (mm)	Internal hinge connection on both sides 6 x cover screws 120 x Screw domes in base 6 x Flange connection pre-stamping (2 x 290mm*80mm, 4 x 210mm*80mm)		
	Outer / (Inner)		
	